




PRODUCT NAME: BOULDER
ITEM NUMBER: 30146BZGTGLD

Please consult your electrician for hanging fixture and wiring.

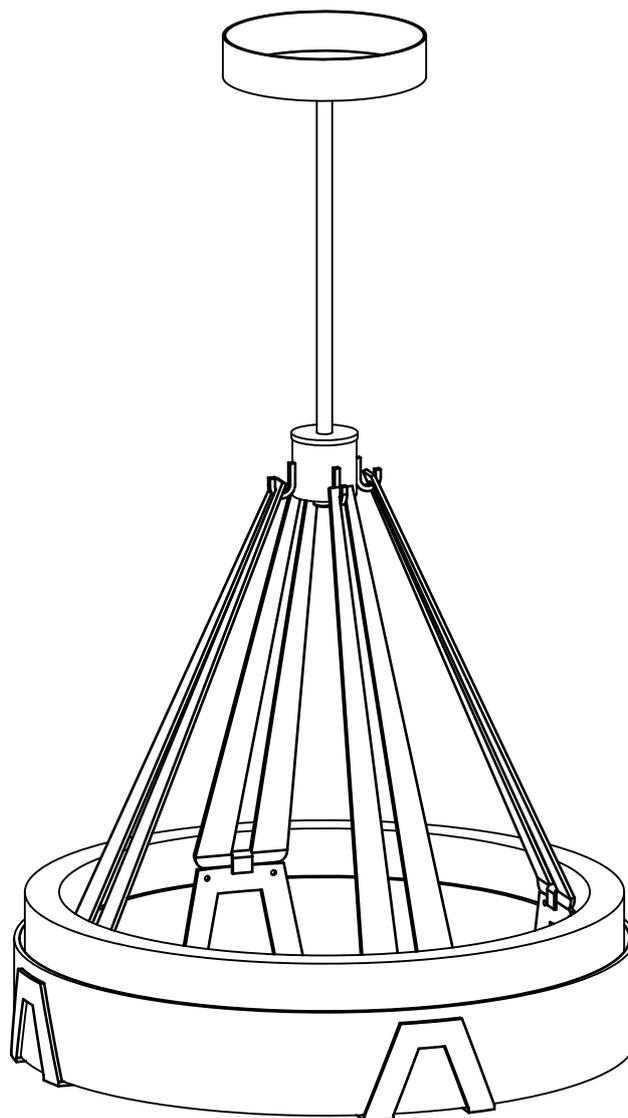


The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer. Below is a list of recommended dimmers:
Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Leviton IPL06-10Z
Leviton 6674-POW
Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.



Warning! Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

LED 2X40W (Bulb included)


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation.

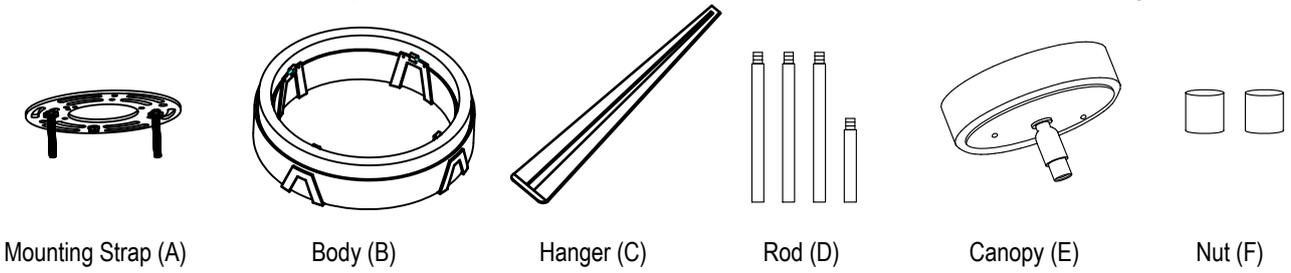


Locate all hardware & components before discarding packaging

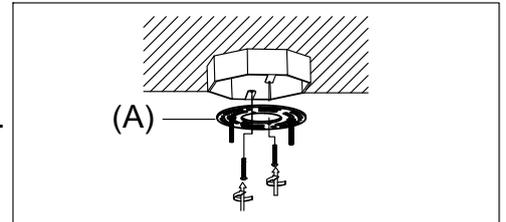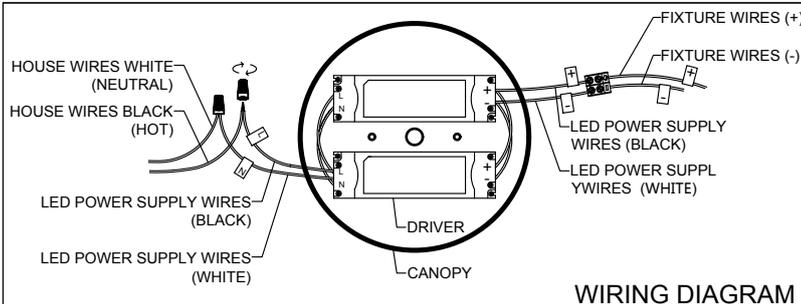


Step.1: Remove mounting Strap (A) from fixture and install to electrical box.

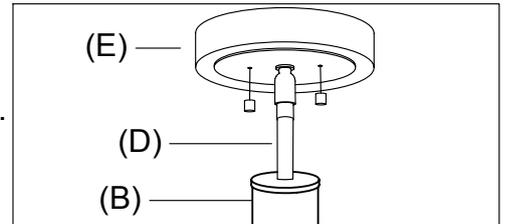


Step.2: Connect the hanger (E) to the lamp body and hook. Determine correct length of rod needed for hanging height. Screw the Rod (D) on the Body (B) and Canopy (E).

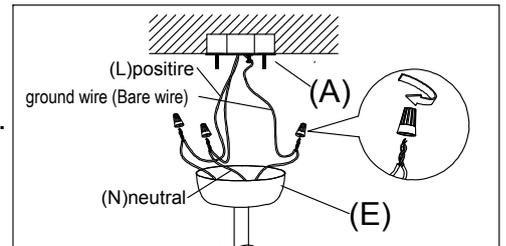

Step.3: Connect the white and black driver wires to the fixture wires with terminal block, connect the white driver wire to the neutral power line wire and the black driver wire to the hot power line wire with wire nuts (see wiring diagram for details). Note: The positive fixture wire is marked by white tracer.

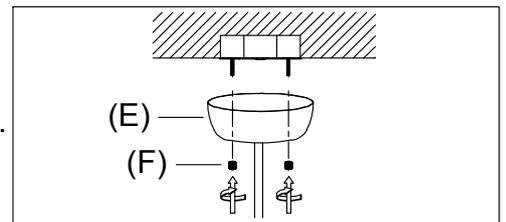

Step.4: Install body (B) to Mounting Strap (A) and tighten nut (F) on the canopy (E) to secure.

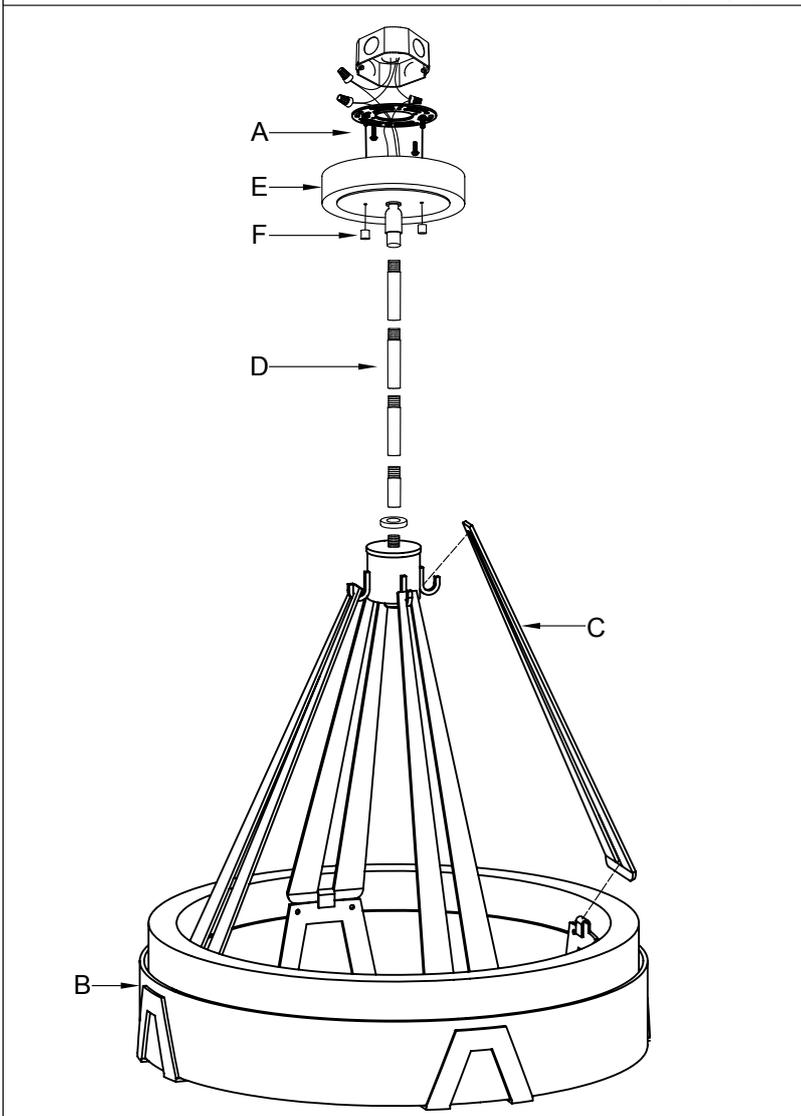

Cleaning & Care:

Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.