

Please go to www. quozel. com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: Integrated LED 12W + Integrated LED 20W

Compatible Dimmer Switches: Lutron DVELV-300P or Lutron SELV-300P.

Estimated Assembly Time: 20-30 minutes


Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Package Contents



A Crossbar Assembly x 1



B Mounting Screw x 2



C Wall Anchor x 2




Self-tapping Screw x 2




E Washer x 2



F Allen Wrench x 1

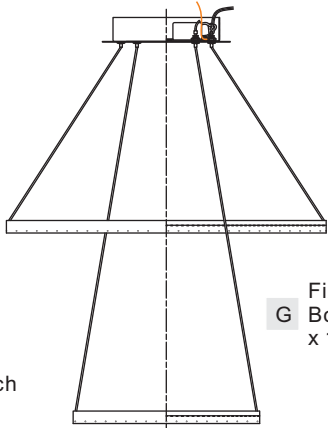

G Fixture Body x 1

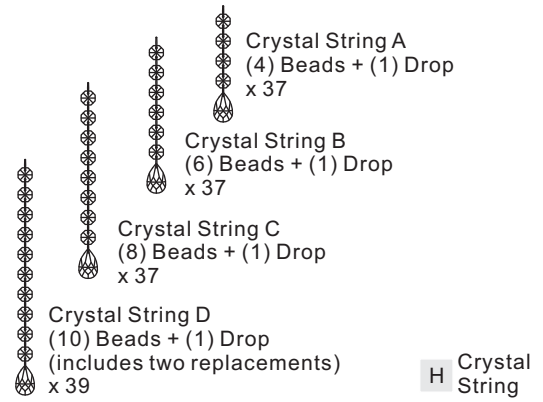

STEP 1 - Adjust the Fixture Body Height

- By using the Allen Wrench (F), unscrew the set screw on the cable clasp. Push the pin on the bottom of the ceiling canopy and adjust the cable to your desired hanging height. Release your hand on the pin and move the cable clasp to the hex nut inside of the ceiling canopy. Tight the set screw on the cable clasp until snug to engage the cable.
- Move the wire clasp to the hex nut inside of the ceiling canopy. Carefully tuck all slack wires inside of the ceiling canopy.
- Make sure each ring is horizontal after adjustments.

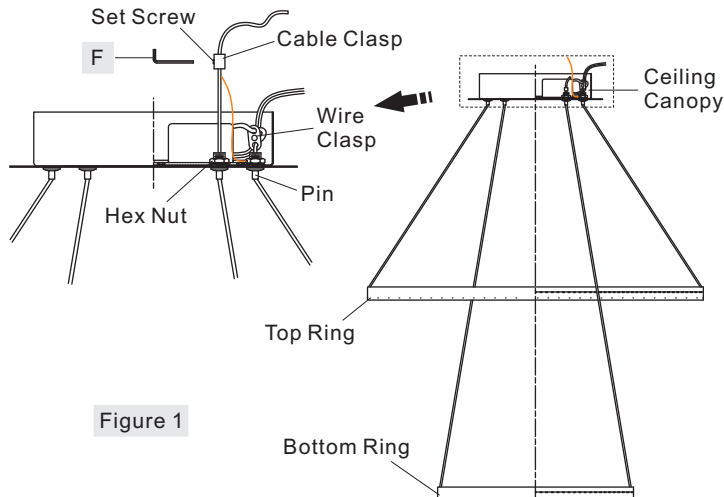


Figure 1

STEP 2 - Attach Crossbar Assembly to Outlet Box

- Attach the Crossbar Assembly (A) onto the outlet box and make two marks on the ceiling from keyholes.
- Remove the Crossbar Assembly (A) and drill proper holes on the ceiling from marks. Insert Wall Anchors (C) into the holes properly. Pass supply wires and ground wire through the center hole of the Crossbar Assembly (A). Attach the Crossbar Assembly (A) to outlet box. Thread outlet box screws (not supplied) into mounting holes on the outlet box. Pass Washers (E) over Self-tapping Screws (D) and thread Self-tapping Screws (D) into Wall Anchors (C). Hand tighten until snug.

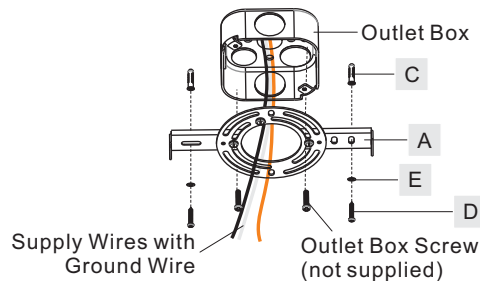


Figure 2

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www. quozel. com

STEP 3 - Wire Connections

- A. Wrap bare or green ground wire around green ground screw on the crossbar, no less than 2 inches from the end of the wire. Tighten the green ground screw.
- B. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

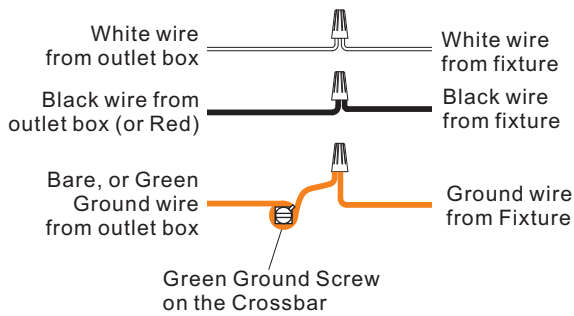


Figure 3

STEP 4 - Attach Fixture Body to Crossbar

- A. Fit excess cord and electrical wires in the ceiling canopy properly. Line up the holes on the side of the ceiling canopy to the mounting holes on the Crossbar Assembly (A). Secure them with Mounting Screws (B). Tighten until snug.



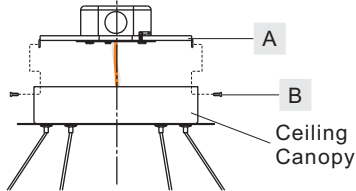


Figure 4

STEP 5 - Attach Crystal Strings

- A. (Refer to CRYSTAL STRINGS DISTRIBUTION) Attach Crystal Strings (H) to top ring and bottom ring of the Fixture Body (G).

Your fixture is now assembled and ready to use. Enjoy!

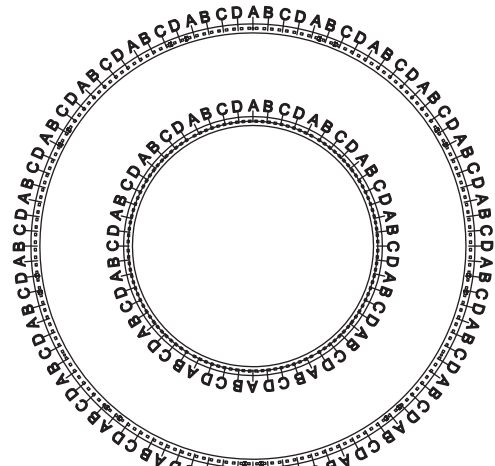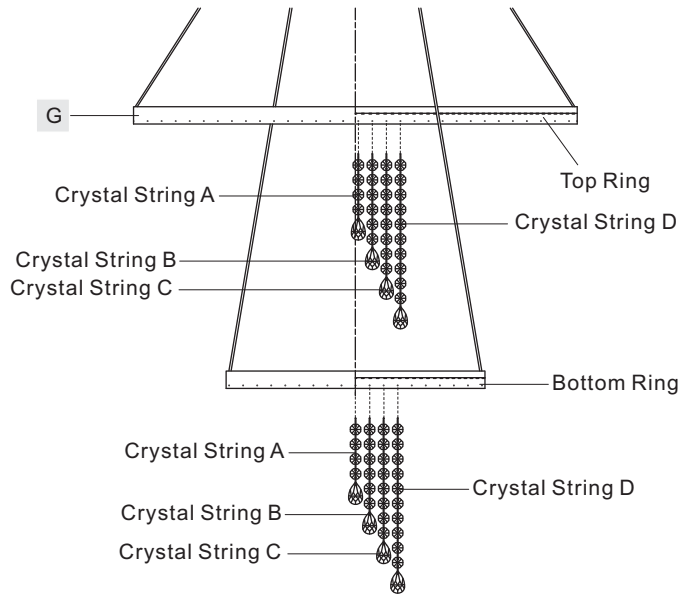

CRYSTAL STRING DISTRIBUTION




Figure 5

Thank you for purchasing a Quoizel product.
 Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
 or visit us on-line at www.quoizel.com

PCBN5202C

FINISH: POLISHED CHROME

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

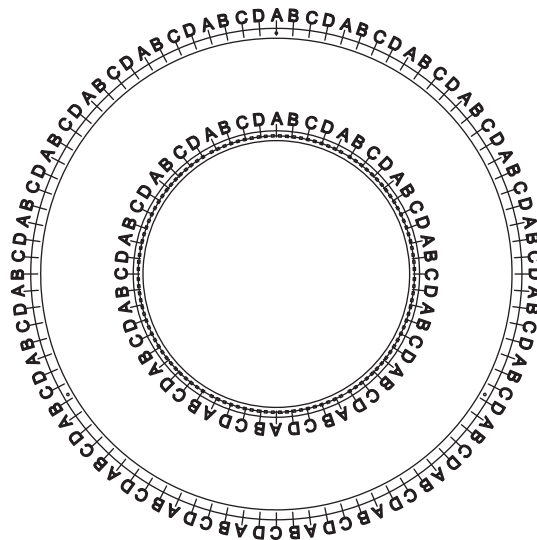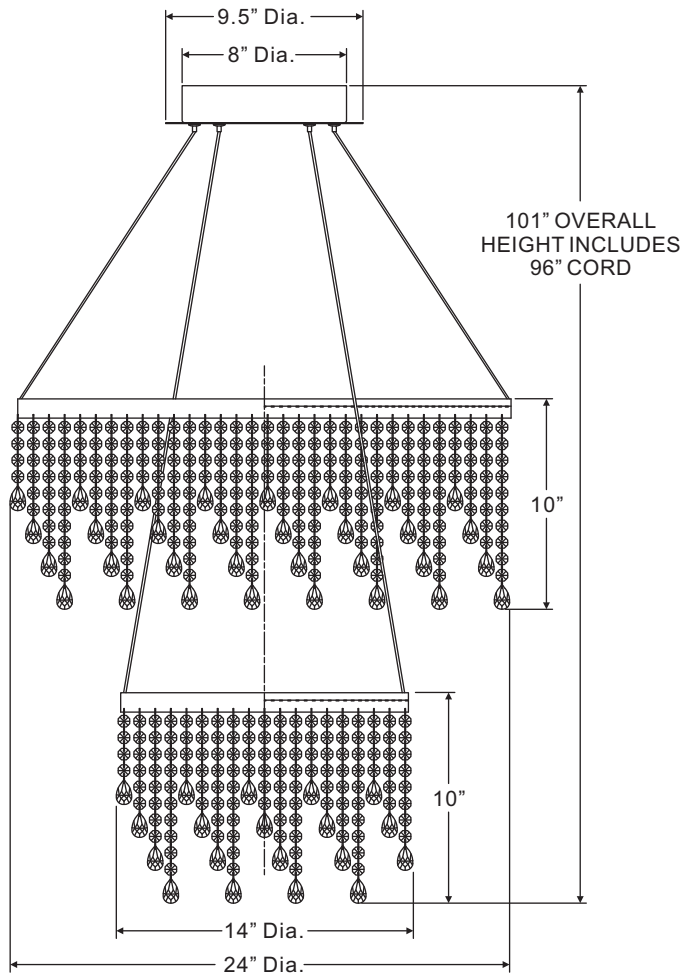

Thank you for purchasing a Quozel product.
Need assistance with parts or assembly? Call Quozel customer service at 1-800-645-3184
or visit us on-line at www.quozel.com